

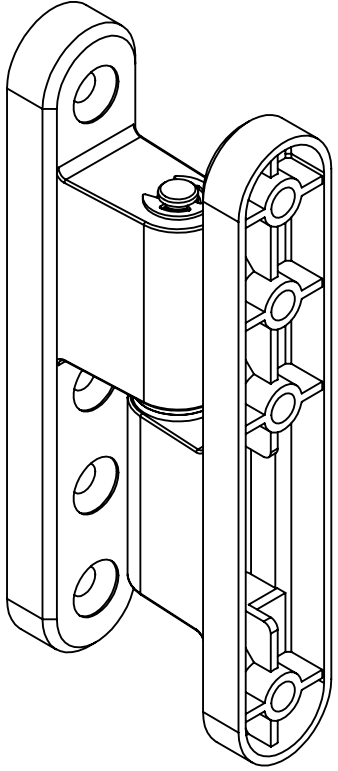

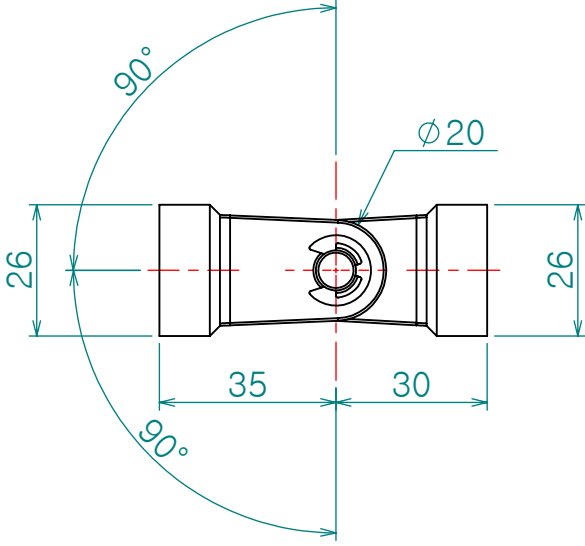


|  |          |
|--|----------|
|  | Dwg. No. |
|--|----------|

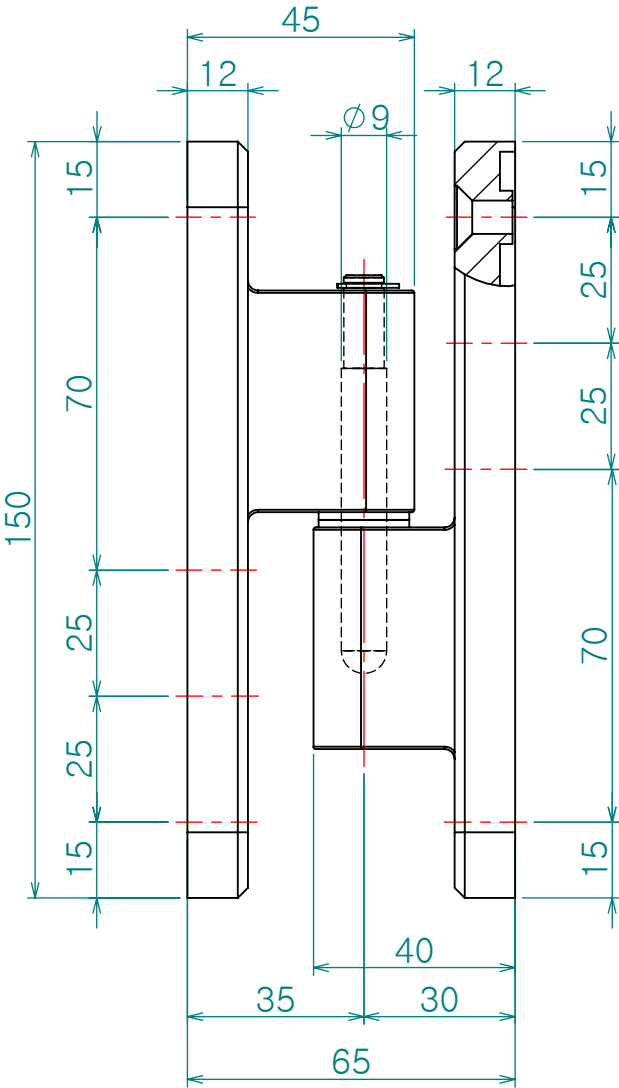


| Re. No. | DESCRIPTION | DATE | DS. | CH. | AP. |
|---------|-------------|------|-----|-----|-----|
| ①       |             |      |     |     |     |
| ②       |             |      |     |     |     |
| ③       |             |      |     |     |     |

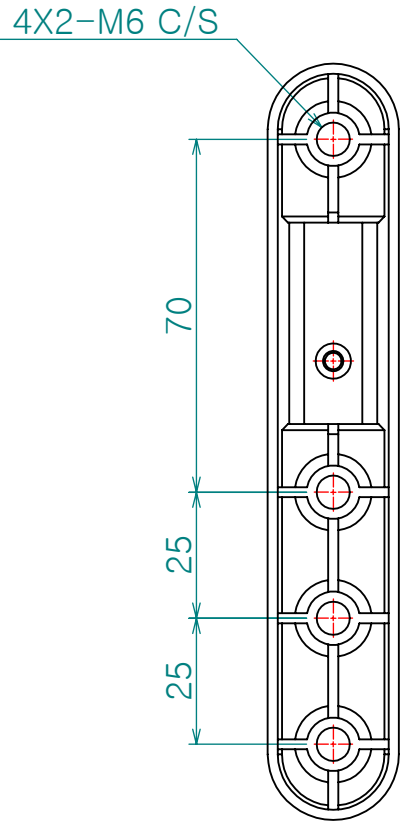

### Note

## 1. 특징 :

## 2. 용도 :

|                   |           |                           |                 |                                                                                       |                                                                                       |
|-------------------|-----------|---------------------------|-----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dimension<br>(mm) | Precision | Material<br><b>STS 주조</b> |                 | Dwg. No.                                                                              | Q'TY<br><b>**</b>                                                                     |
| 0.5~3<br>3~6      | ±0.05     | Finish<br><b>광택연마</b>     |                 | Part Name.<br><b>CH- 052-4</b>                                                        | Weight<br><b>-</b>                                                                    |
| 6~30              | ±0.1      | Revision                  | Sheet Size      | Ass'y Name                                                                            | Scale                                                                                 |
| 30~120            | ±0.15     | -                         | <b>A3</b>       | <b>**</b>                                                                             | 1:1.5                                                                                 |
| 120~315           | ±0.2      | Date                      | Designed by     | Model No.                                                                             |  |
| 315~1000          | ±0.3      | 2013-01-02                | <i>Shin S H</i> | <b>**</b>                                                                             |                                                                                       |
| 1000~2000         | ±0.5      | Checked by                | Approved by     |  |                                                                                       |
| KS B 0412에 준함     |           |                           |                 |                                                                                       |                                                                                       |

