
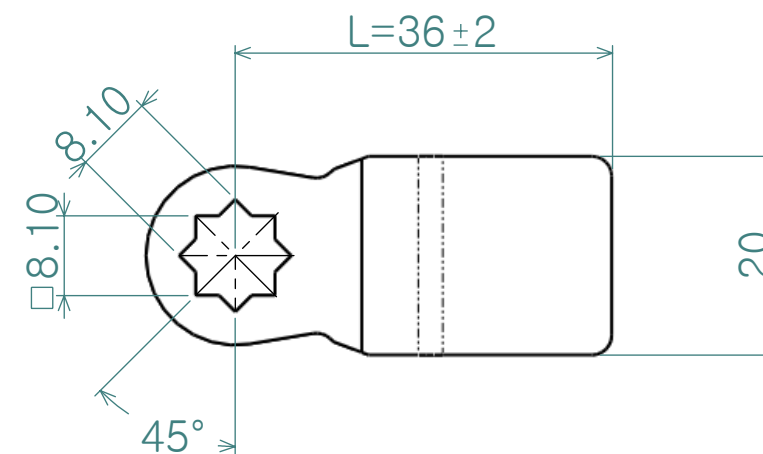
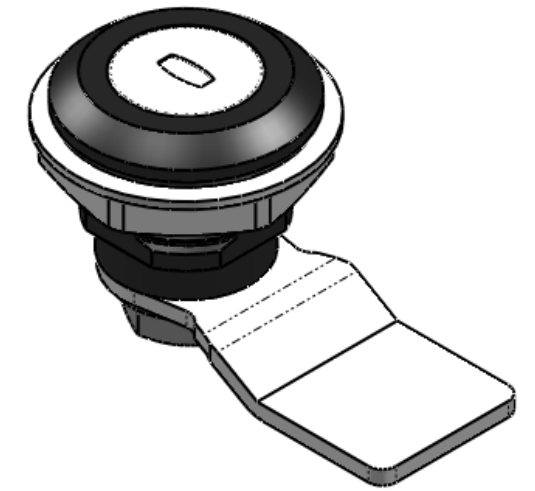

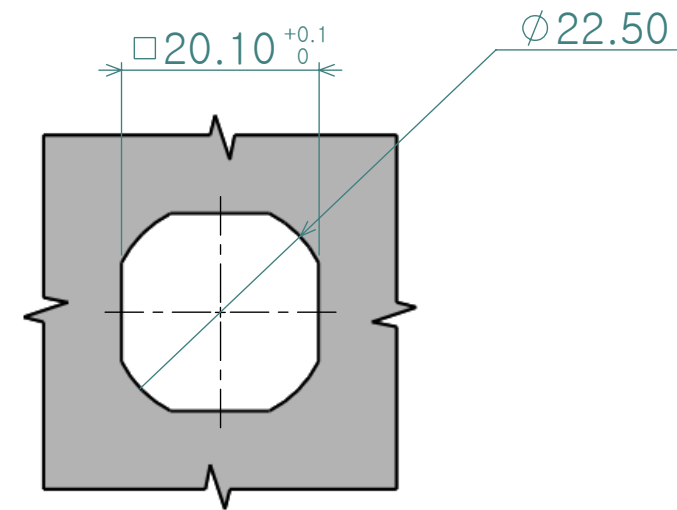


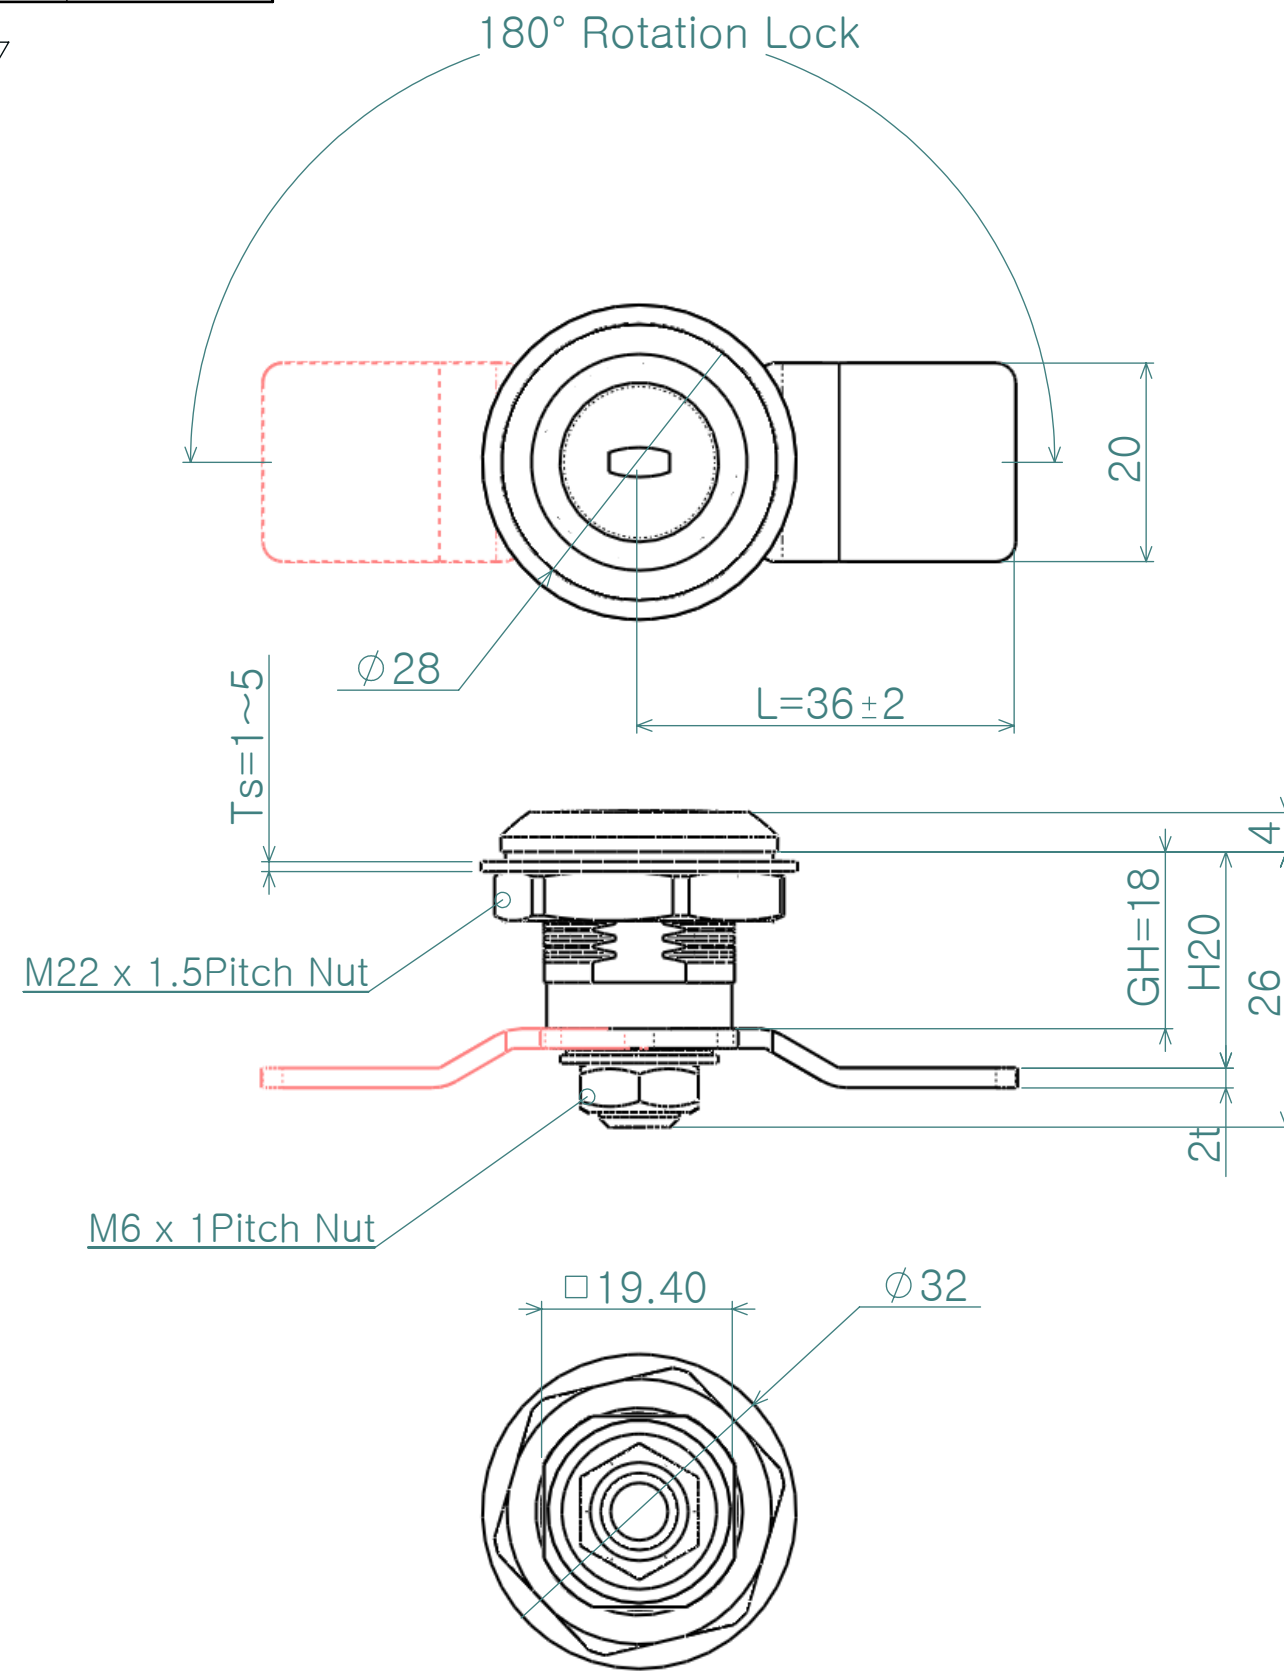

## 2. 용도 :

|                   |           |                              |                         |                                                                                       |                                                                                       |
|-------------------|-----------|------------------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dimension<br>(mm) | Precision | Material<br>아연합금(Zinc),Steel |                         | Dwg. No.                                                                              | Q'TY                                                                                  |
| 0.5~3<br>3~6      | ±0.05     | Finish<br>블랙 크롬 도금,아연도금      |                         | Part Name.                                                                            | Weight<br>-                                                                           |
| 6~30              | ±0.1      | Revision<br>-                | Sheet Size<br>A3        | Ass'y Name                                                                            | Scale<br>1.3:1                                                                        |
| 30~120            | ±0.15     | Date<br>2010-03-11           | Designed by<br>Shin S H | Model No.<br>CC-MS805                                                                 |  |
| 120~315           | ±0.2      | Checked by                   | Approved by             |  |                                                                                       |
| 315~1000          | ±0.3      |                              |                         |                                                                                       |                                                                                       |
| 1000~2000         | ±0.5      |                              |                         |                                                                                       |                                                                                       |
| KS B 0412에 준함     |           |                              |                         |                                                                                       |                                                                                       |