
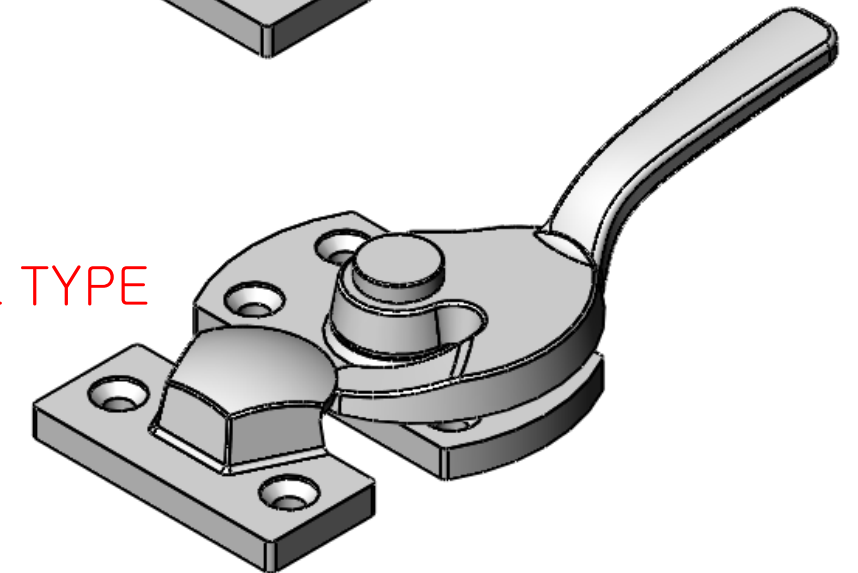
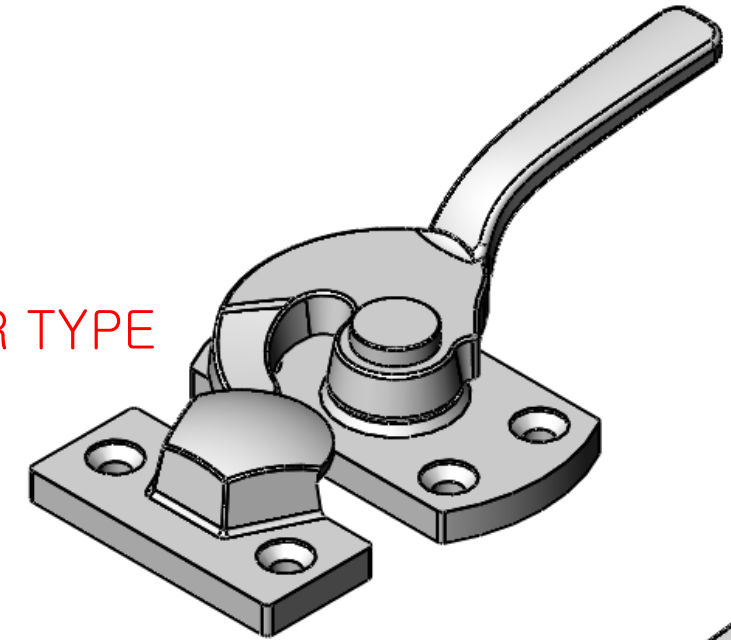
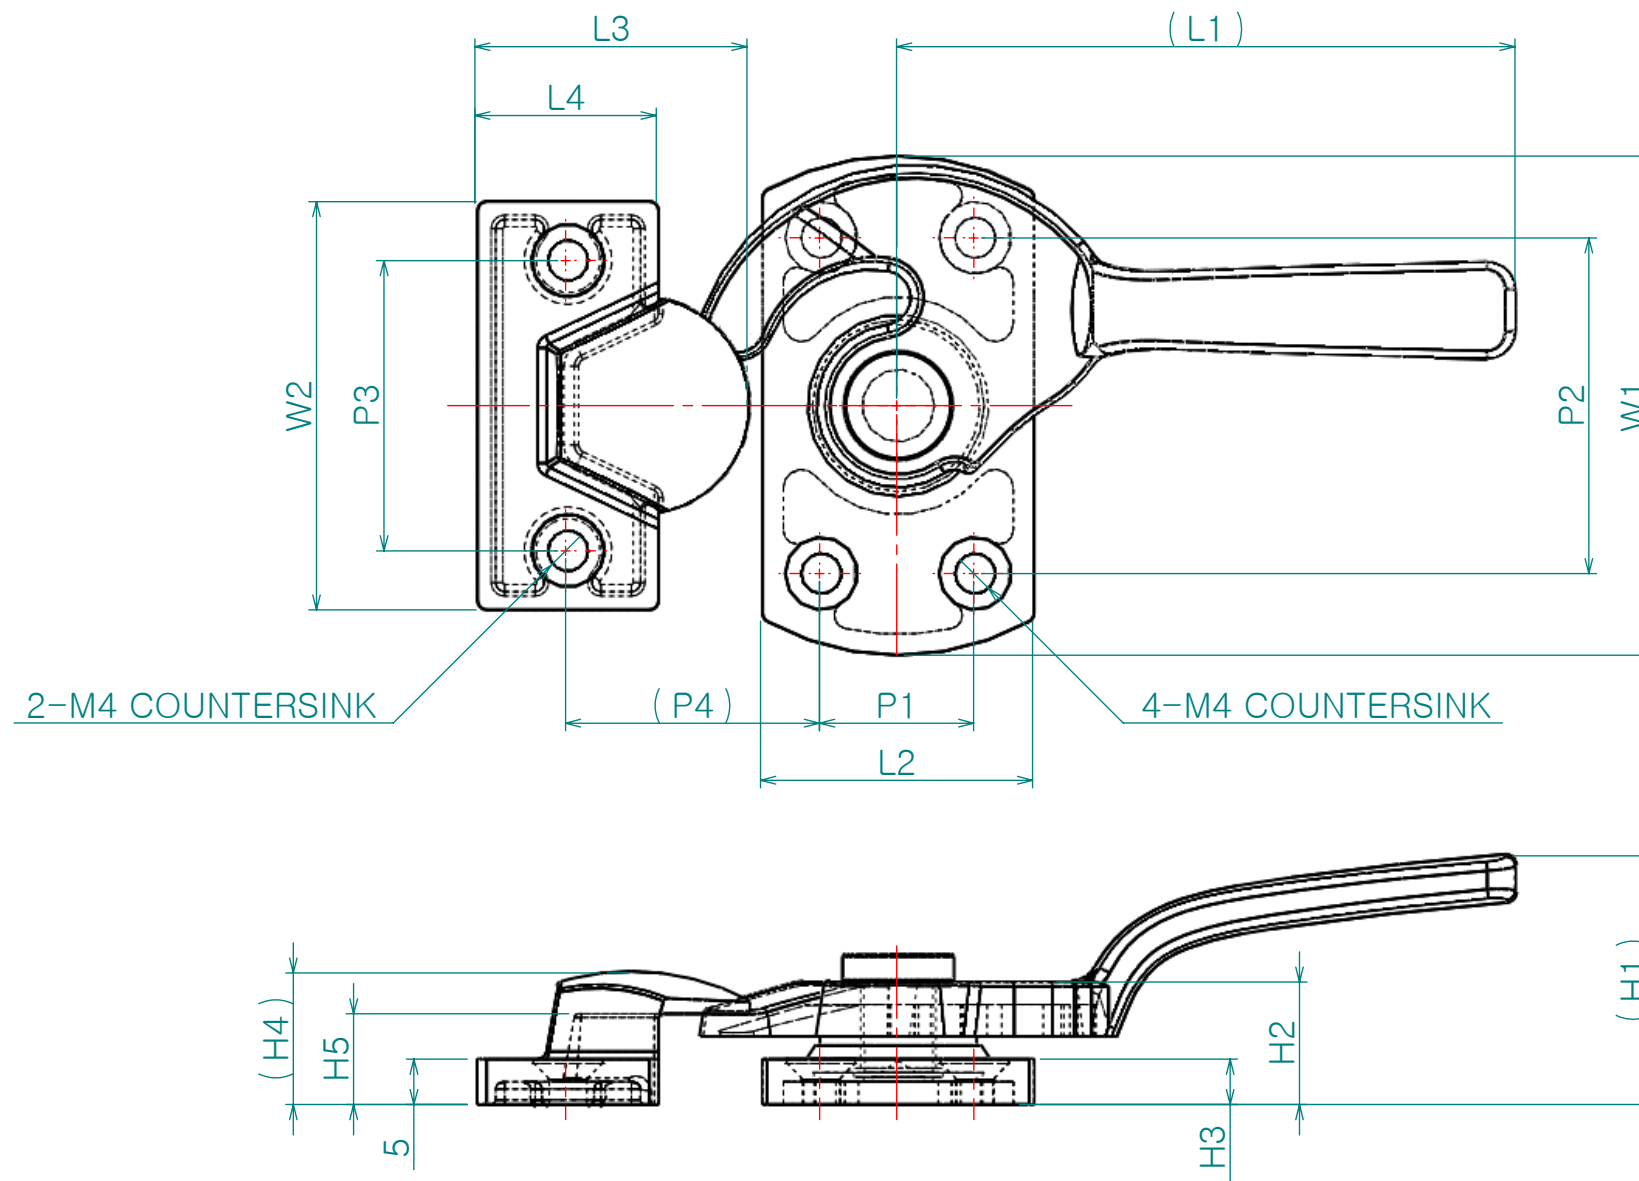




| 제 품 명           | L1  | L2 | L3 | L4 | W1   | W2 | H1 | H2   | H3 | H4   | H5   | P1   | P2 | P3   | P4 |
|-----------------|-----|----|----|----|------|----|----|------|----|------|------|------|----|------|----|
| CM-1006-1L, R   | 68  | 30 | 30 | 20 | 55   | 45 | 28 | 13.5 | 5  | 14.5 | 10   | 17   | 37 | 32   | 28 |
| CM-1006-1.5L, R | 84  | 30 | 30 | 20 | 60   | 45 | 35 | 13.5 | 5  | 14.5 | 10   | 20   | 40 | 32   | 28 |
| CM-1006-2L, R   | 115 | 40 | 35 | 24 | 77.5 | 48 | 43 | 15.5 | 6  | 16.5 | 12.5 | 23.5 | 51 | 33.5 | 34 |
| CM-1006-3L, R   | 125 | 45 | 40 | 28 | 90   | 52 | 49 | 17   | 6  | 19   | 14   | 34.5 | 70 | 40   | 43 |

## 2. 용도 :

|                   |           |                    |                         |                                                                                       |                                                                                       |
|-------------------|-----------|--------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dimension<br>(mm) | Precision | Material<br>STS316 |                         | Dwg. No.                                                                              | Q'TY<br>**                                                                            |
| 0.5~3<br>3~6      | ±0.05     | Finish<br>광택연마     |                         | Part Name.<br>**                                                                      | Weight<br>-                                                                           |
| 6~30              | ±0.1      | Revision<br>-      | Sheet Size<br>A3        | Ass'y Name<br>**                                                                      | Scale<br>1.2:1                                                                        |
| 30~120            | ±0.15     | Date<br>2012-06-15 | Designed by<br>Shin S H | Model No.<br>CM-1006                                                                  |  |
| 120~315           | ±0.2      | Checked by         | Approved by             |  |                                                                                       |
| 315~1000          | ±0.3      |                    |                         |                                                                                       |                                                                                       |
| 1000~2000         | ±0.5      |                    |                         |                                                                                       |                                                                                       |
| KS B 0412에 준함     |           |                    |                         |                                                                                       |                                                                                       |