
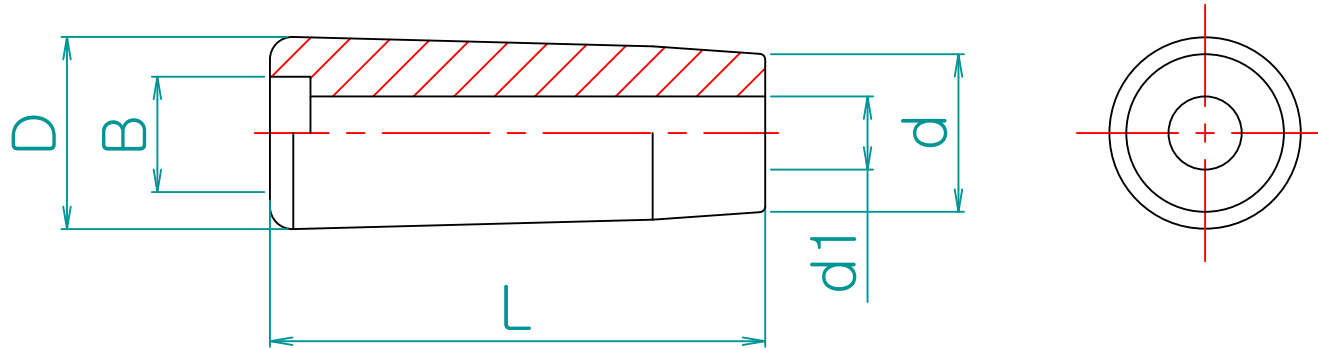


| Rev. No. | DESCRIPTION | DATE | DS. | CH. | AP. |
|----------|-------------|------|-----|-----|-----|
| △ | | | | | |
| △ | | | | | |
| △ | | | | | |



unit : mm

| 제품명 | M | D | L | B | d | d1 |
|--------|-----|----|----|----|----|-----|
| PGC 6 | M6 | 17 | 44 | 10 | 14 | 6.5 |
| PGC 8 | M8 | 21 | 55 | 13 | 16 | 8 |
| PGC 10 | M10 | 25 | 74 | 15 | 17 | 10 |
| PGC 12 | M12 | 30 | 86 | 17 | 21 | 12 |

Note

1. 특징 :

2. 용도 :

| | 재 질 | 표면처리 |
|-----|----------------|------|
| 그립부 | 나일론(Polyamide) | 흑색유광 |

| | | | | |
|----------------|-----------|----------------------|-------------|--------|
| Dimension (mm) | Precision | Material | Dwg. No. | Q'TY |
| 0.5~3 | | 나일론(Polyamide) | | ** |
| 3~6 | ±0.05 | Finish | Part Name. | Weight |
| 6~30 | ±0.1 | 흑색유광 | ** | - |
| 30~120 | ±0.15 | Revision | Ass'y Name | Scale |
| 120~315 | ±0.2 | - | ** | 1:1 |
| 315~1000 | ±0.3 | Date | Model No. | |
| 1000~2000 | ±0.5 | 2010-09-07 | PGC | |
| | | Designed by Shin S H | | |
| | | Checked by | Approved by | |
| KS B 0412에 준함 | | | | |